

# Pushbutton Enclosure

# IP-SSPB2

316 STAINLESS STEEL | IP66

2 HOLE

IP Enclosures SSPB Range of grade 316/316L stainless steel pushbutton enclosures are suitable for extreme duty heavy industrial applications.

**Size:** 2 Hole, 22mm

**Protection:** Complies with IP66

**Standard:** AS/EN/IEC60529 

**Material:**


- Body: 1.5mm 316/316L Stainless Steel
- Lid/Door: 1.5mm 316/316L Stainless Steel
- Seal: Polyurethane

**Surface Finish:** 0.4 micron Ra surface brushed finish


**Body:** The robust monoblock body is fabricated using 1.5mm 316/316L stainless steel. Flat face sealing surfaces are provided to increase seal life. Integral mounting feet to suit M6 fasteners are provided.

**Lid/Door:** The robust door is fabricated using 1.5mm 316/316L stainless steel and incorporates a polyurethane seal and M5 fasteners.

**Seal:** A high quality machine-applied full perimeter Polyurethane seal foamed in place (FIP) provides



TOP VIEW

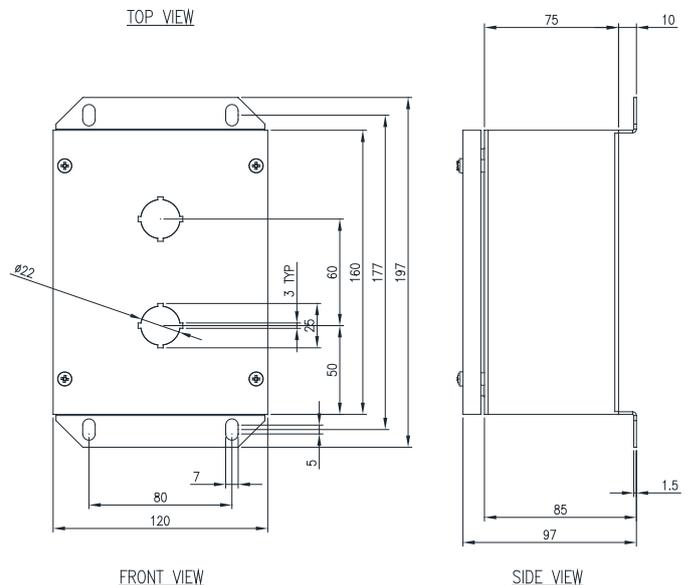

FRONT VIEW

SIDE VIEW