


58m³/hr 150mm x 150mm

IP Enclosures provide a wide range of ventilation products for electrical enclosures. The range consists of a modern Italian design with minimal external projection and allows for easy filter maintenance due to a front-opening grille. The configuration of the grille, seal gasket and filter mat provide an IP54 protection. All moulded parts are made of highly resistant and self-extinguishing ABS. IP Enclosures ventilation products are manufactured to the highest quality in Italy.



Features	Unit	IP-V2000
Air flow rate (free blow)	m ³ /h	-
Air flow rate with exit filter	m ³ /h	-
Power supply	V/Hz	-
Dimensions HxWxD	mm	150x150x37
Power consumption	W	-
Current consumption	A	-
Overcurrent protection	-	-
Electrical connection	-	-
Duty cycle	-	-
Operating temperature	°C (°F)	-
Protection degree / Class	-	IP54
Noise level	dB(A)	-
Flow direction	-	-
Bearing	-	-
Filter mat EN779	-	G3
Service life (at 40°C)	hr	-
Material	-	-
Wall thickness	mm	-
Gasket	-	-
Weight (with packaging)	kg	0.18(0.23)
Package dimensions H x W x D	mm	165x165x45
Mounting	-	-
Conformity/Certifications	-	-

* 0.5-2.5mm²

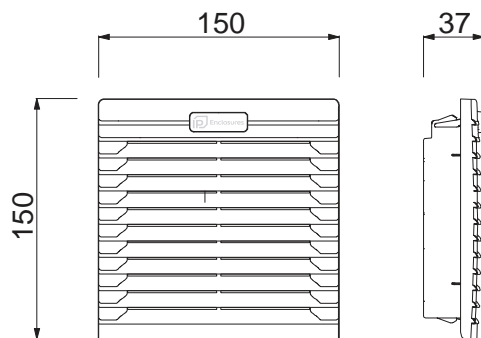

IP-V2000

Easy Maintenance



1. Open Grille




2. Remove Filter



3. Insert Filter



4. Close Grille

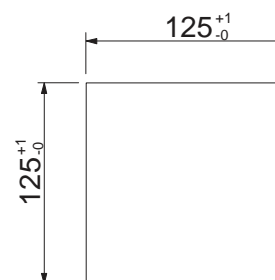

Cut-Out Dimensions